


- Risoluzione 0,001mm
- Livello di protezione IP54
- Uscita dati
- Frizione sul codolo
- Punte in metallo duro da 12mm
- Anelli riscontro e prolunghes inclusi



361-003-01



campo 6-12mm

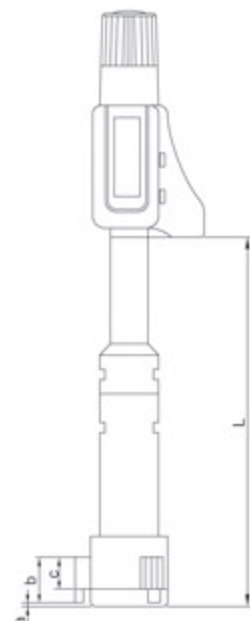

campo 12-100mm

Code	Campo	Precisione	Anello	Prolunga	a	b	c	L
361-001-01	6-8mm	4µm	Ø6mm	100mm	1.5	2.5	/	54.5
361-002-01	8-10mm	4µm	Ø8mm	100mm	1.5	2.5	/	54.5
361-003-01	10-12mm	4µm	Ø10mm	100mm	1.5	2.5	/	54.5
361-004-01	12-16mm	4µm	Ø16mm	150mm	0.5	6	4.5	80
361-005-01	16-20mm	4µm	Ø16mm	150mm	0.5	6	4.5	80
361-006-01	20-25mm	4µm	Ø25mm	150mm	0.5	8	6	90
361-007-01	25-30mm	4µm	Ø25mm	150mm	0.5	8	6	90
361-008-01	30-40mm	4µm	Ø40mm	150mm	0.5	14	12	97
361-009-01	40-50mm	5µm	Ø40mm	150mm	0.5	14	12	97
361-010-01	50-63mm	5µm	Ø62mm	150mm	0.5	17.5	14.5	114
361-011-01	62-75mm	5µm	Ø62mm	150mm	0.5	17.5	14.5	114
361-012-01	75-88mm	5µm	Ø87mm	150mm	0.5	17.5	14.5	114
361-013-01	87-100mm	5µm	Ø87mm	150mm	0.5	17.5	14.5	114

