




TABLET VOICE CALIPER

- Patent UA 99687, UA 103318, UA 104879, UA 112254 by MICROTECH
- Extra-High accuracy up to $\pm 15\mu\text{m}$ (on 500mm range)
- Built in computer with 5" touch screen
- Voice mode
- Infrared pirometer and temperature compensation (optional)
- Optimal measuring force module
- Mathematical error compensation
- Go/ NoGo function (limits)
- Graphical mode
- 100% metrological control
- ISO 17025 certificate for requirement

DESCRIPTION

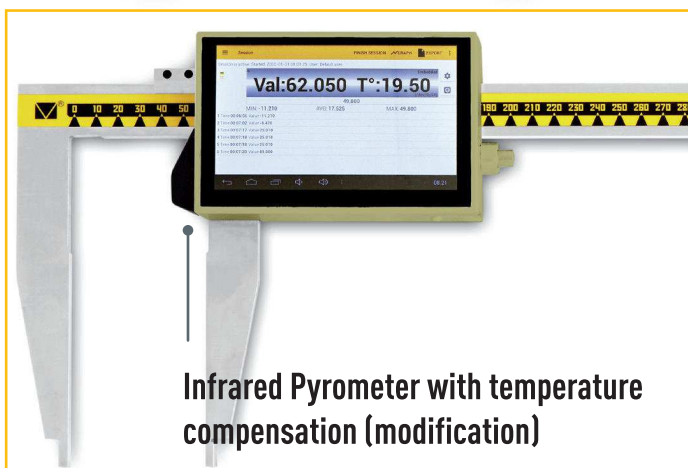



TABLET VOICE CALIPER

Item No	Range	Jaw length	Resolution	Accuracy	Measuring force	Math error compensation	Voice mode
	mm	mm	mm	mm	N		
141099051	0-500	100	0,01	±0,020	20	+	+
141099052	0-500	150	0,01	±0,020	25	+	+
141099055	0-500	300	0,01	±0,030	35	+	+
141099102	0-1000	150	0,01	±0,030	20	+	+
141099105	0-1000	300	0,01	±0,030	40	+	+
141099151	0-1500	150	0,01	±0,030	20	+	+
141099155	0-1500	300	0,01	±0,030	40	+	+
141099202	0-2000	150	0,01	±0,040	25	+	+
141099205	0-2000	300	0,01	±0,040	40	+	+
141099302	0-3000	150	0,01	±0,050	25	+	+
141099305	0-3000	300	0,01	±0,060	40	+	+
141099402	0-4000	150	0,01	±0,060	25	+	+
141099405	0-4000	300	0,01	±0,070	40	+	+

TABLET MICRON CALIPER

Item No	Range	Jaw length	Resolution	Accuracy	Measuring force	Math error compensation	Voice mode
	mm	mm	mm	mm	N		
141098051	0-500	100	0,001	±0,015	20	+	+
141098052	0-500	150	0,001	±0,015	25	+	+
141098055	0-500	300	0,001	±0,025	35	+	+
141098102	0-1000	150	0,001	±0,025	20	+	+
141098105	0-1000	300	0,001	±0,030	40	+	+
141098151	0-1500	150	0,001	±0,025	20	+	+
141098155	0-1500	300	0,001	±0,030	40	+	+
141098202	0-2000	150	0,001	±0,030	25	+	+
141098205	0-2000	300	0,001	±0,040	40	+	+
141098302	0-3000	150	0,001	±0,040	25	+	+
141098305	0-3000	300	0,001	±0,060	40	+	+
141099802	0-4000	150	0,001	±0,050	25	+	+
141099805	0-4000	300	0,001	±0,065	40	+	+

TABLET MICRON CALIPER WITH TEMPERATURE COMPENSATION

Item No	Range	Jaw length	Resolution	Accuracy	Measuring force	Math error compensation	Voice mode	Temperature compensation
	mm	mm	mm	mm	N			
141098051	0-500	100	0,001	±0,015	20	+	+	0-50°C
141098052	0-500	150	0,001	±0,015	25	+	+	0-50°C
141098055	0-500	300	0,001	±0,025	35	+	+	0-50°C
141098102	0-1000	150	0,001	±0,025	20	+	+	0-50°C
141098105	0-1000	300	0,001	±0,030	40	+	+	0-50°C
141098151	0-1500	150	0,001	±0,025	20	+	+	0-50°C
141098155	0-1500	300	0,001	±0,030	40	+	+	0-50°C
141098202	0-2000	150	0,001	±0,030	25	+	+	0-50°C
141098205	0-2000	300	0,001	±0,040	40	+	+	0-50°C
141098302	0-3000	150	0,001	±0,040	25	+	+	0-50°C
141098305	0-3000	300	0,001	±0,060	40	+	+	0-50°C
141099802	0-4000	150	0,001	±0,050	25	+	+	0-50°C
141099805	0-4000	300	0,001	±0,065	40	+	+	0-50°C