





PRECISION DIGITAL CALIPER

- Accuracy higher than DIN 862 requirements
- Modification with self lubrication patented technology (Pat. UA 201707025)
- Resolution 5 μ m
- CR1632 (3V) battery
- With thumb wheel
- Thickness of frame 3.5mm
- Automatic wake up by moving electronic
- Sleeping mode after 10 min non use
- With depth rod
- 100% metrological control
- ISO 17025 certificate for requirement

DESCRIPTION

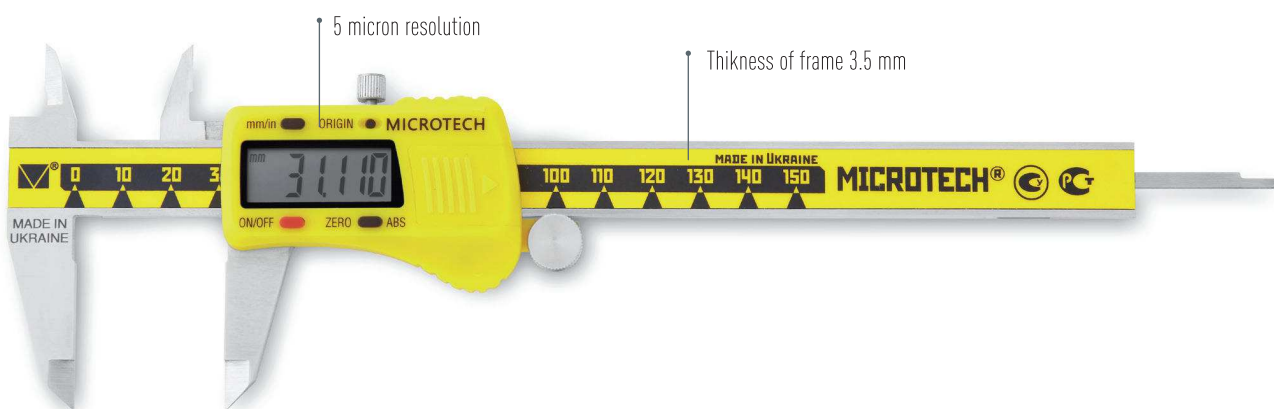

Modifications with lubrication of guides for easy sliding

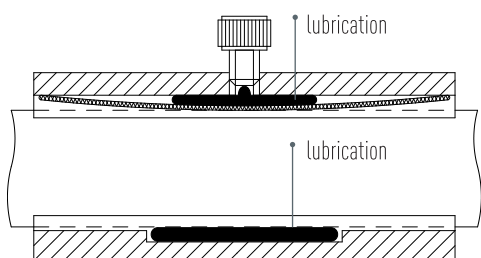

 **MICROTECH**
METROLOGICAL CONTROL

 **PRECISION SERIE**

Item No	Range	Resolution	Accuracy	Jaw length	Proof	Guides lubrication	Data output
	mm	mm	mm	mm			
141082112	0-150	0,005	$\pm 0,020$	40	IP-54	-	RS-232
141084112	0-150	0,005	$\pm 0,020$	40	IP-54	+	RS-232
141082212	0-200	0,005	$\pm 0,020$	50	IP-54	-	RS-232
141084212	0-200	0,005	$\pm 0,020$	50	IP-54	+	RS-232
141082313	0-300	0,005	$\pm 0,030$	60	IP-54	-	RS-232
141084313	0-300	0,005	$\pm 0,030$	60	IP-54	+	RS-232

